

SIEMENS

Miro

Unique atmospheres

Miro series combines style and the influence of late Bauhaus. Miro demonstrates an innovative and different concept with its lines, something that can only be achieved when things are done properly. This top-quality series has the perfect finish in all details, with exclusive and modern textures. The square shape, smooth surface, fine chrome-plated line on the angle of the customised switches and materials make up a harmonious unit that makes it different, meeting and exceeding the high expectations of customers with its quality, design and feel.




Real aluminium



Crystal



Painted finish



Wood



Matt finish





A contemporary classic

Miro

- Floating frame, seems to be suspended in mid air, visual lightness.
- The frame is only 8 mm high.
- Square and compact switch diffuser, blue LED lighting.
- Solid and natural glass, wood and metal frames.
- Switch with or without embellisher, to be chosen by the interior designer.

Matt colours



Matt white




Matt black

- Miro matt, stylish contrast.
- Miro glass, impeccable elegance.
- Miro wood, natural appeal.
- Miro aluminium, calm and accurate.
- Miro colour, practical and light.

Glass




Orient Red /
Carbon Metallic

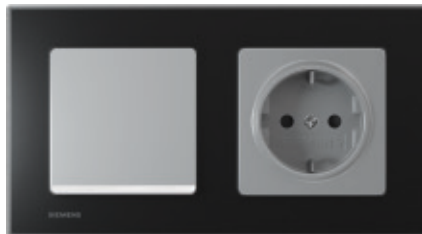

Black /
Aluminium Metallic

Wood



Maple Red /
Aluminium Metallic



Cherry /
Carbon Metallic

Aluminium



Natural /
Carbon Metallic



Yellow rust /
Polar White

Colour




Polar White



Aluminium Metallic



Carbon Metallic

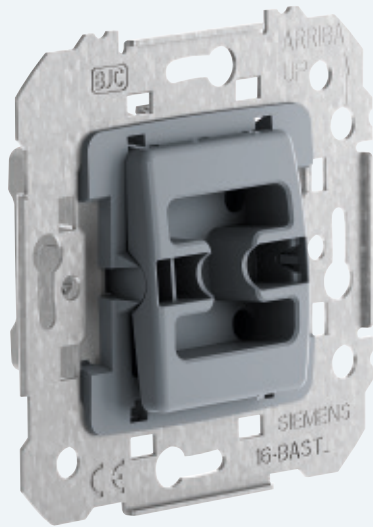


Its structure has an ergonomic design to guarantee easy, quick and comfortable installation. It features a compact mechanism to use all space inside the mounting box and facilitates cable routing. It is designed to ensure proper installation.

- One-way and two-way MEC18 switches rated at 16A are used, allowing many different applications with the same mechanism and reducing the number of items and references that must be stocked.
- Galvanised steel fixing frames with anti-corrosion treatment to ensure durable installation components.
- Fixing frames with upper and lower profiles to facilitate assembly and a rigid position of the mechanism.


The socket outlets feature increased touch protection elements and use standard STAI connectors (open safety screw system), which only require connection and tightening. The screws close with a single operation and have an engraved floating nut which prevents the cable from slipping and guarantees perfect fixture across the whole of the contact surface. The three conductors enter through the top of the socket outlet. They are also screwed on one side of the socket outlet. The outlets, which are supplied separately from the covers, allow terminal connection and fast and safe fixture.

Certifications



MEC 18

The same mechanism for 5 different designs

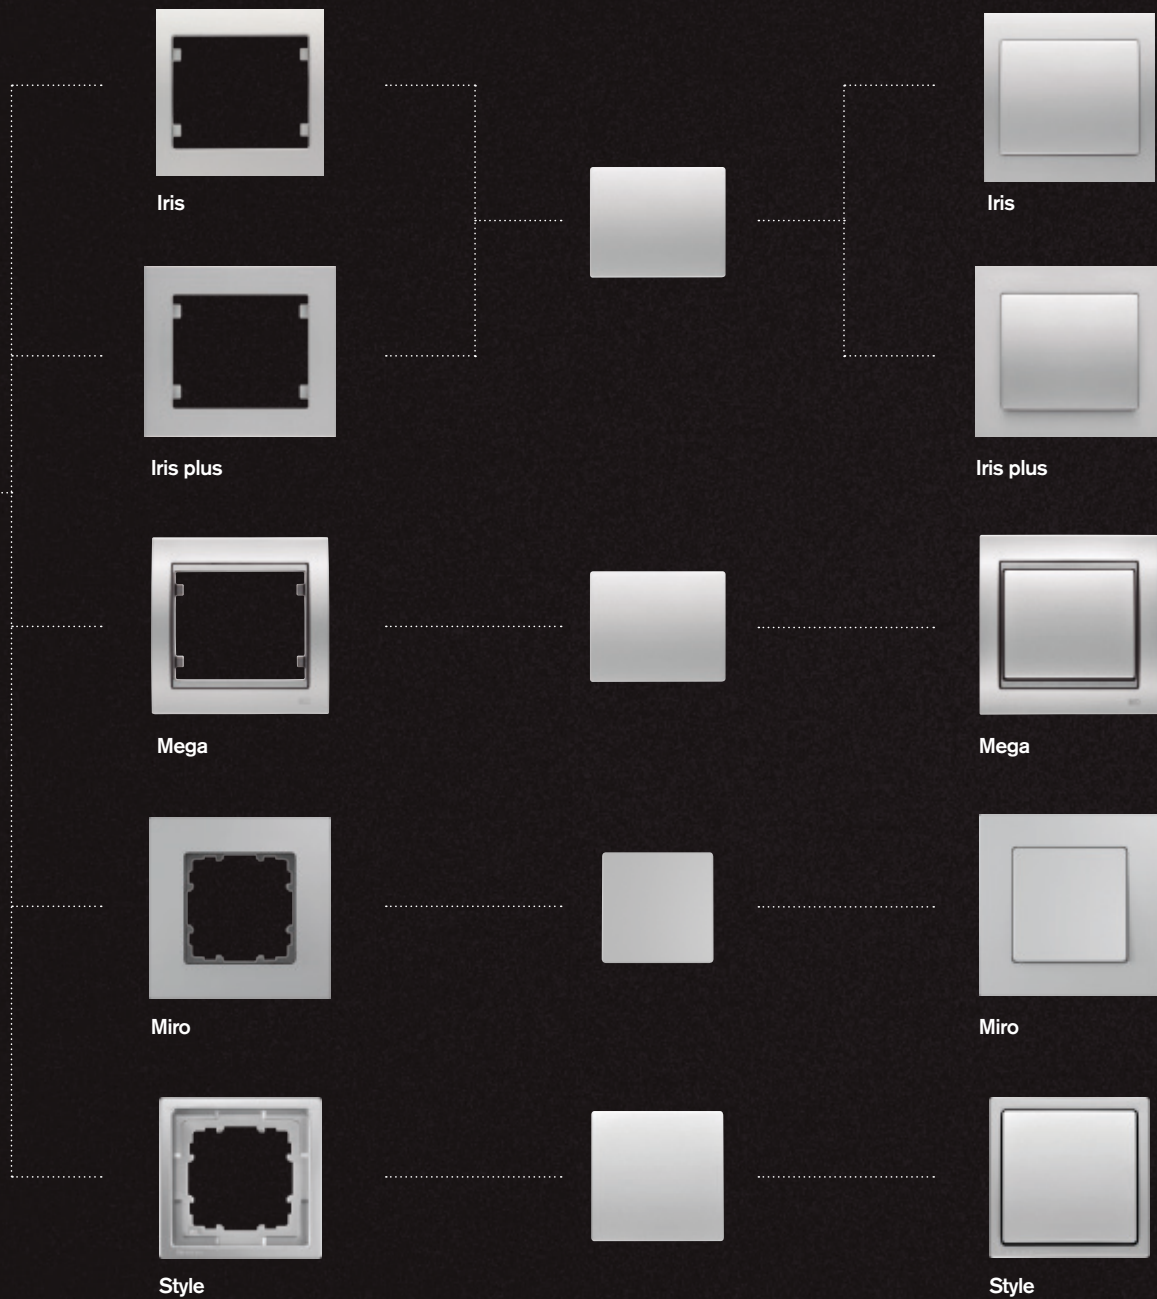

Many different functions

The Miro series offers a wide range of functions to cater to today's needs. Light intensity dimmers, sound controllers and blind rolling up and down mechanisms. Choose the options you need, guaranteeing total comfort and enjoy our solutions' colourful and appealing designs.



Dimmers

Dimmers are the perfect element create an atmosphere in rooms by adjusting the lighting levels to the desired intensity. The intensity can be increased or decreased. The power and technology of the different lamps requires using specific dimmers, adapted in each case to adjust the power levels. BJC offers a wide range of dimmers, suitable for different lamps and power ratings.



Chargers with double USB

The Schuko® socket with double USB Type A and Type C allows the simultaneous charging of two terminals while maintaining the usability of the socket. Quick and easy installation in a standard flush-mounted box.

- Power Delivery (required by EU by the end of 2024)
- Quick charge
- For standard flush-mounted box.



Multimedia

The multimedia connectors are the perfect solution to prevent exposed wiring in the installation and for the distribution of electronic devices in any type of installation; whether household or commercial. The HDMI, VGA, RJ45, stereo cable and other outputs can provide separate input and output sources, for efficient connections and uncluttered installations.




LED indicator

Siemens' modular LED indicators are used to indicate: stairs, waiting rooms, interiors, corridors and calls. They are available in three tones of white, green and red. The modular system allows the combination of two beacon lights or two elements, such as a buzzer and LED beacon light, indicating that there is a call; sound and visual.




Smart solutions with KNX

KNX connects a network of functions, including security, climate-control, lighting and multimedia devices. The system's centralised and smart control systems can cater to the needs of each specific case and can be programmed at any time. With a discreet design, Siemens' keyboards allow the installation to be easily and comfortably handled.




Centralised blind control

By simply pressing a button, this allows you to pull all the blinds in a house or on a floor down, either individually or centrally.

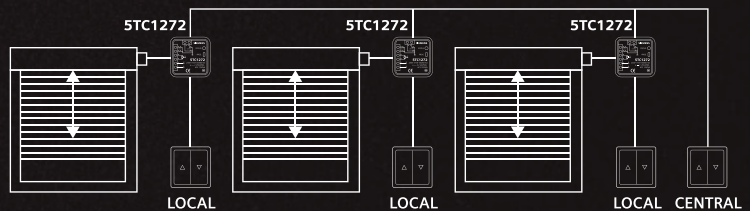


16 A in Mec switches

The switches feature a powerful 16 A device with automatic terminal connection, with an ergonomic design for comfortable, easy and safe handling.

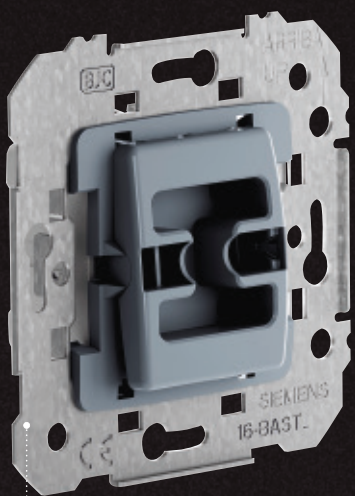

Mechanism

Mec 18 mechanism, which can be adapted to Iris, Iris plus, Mega and Siemens products for your comfort.

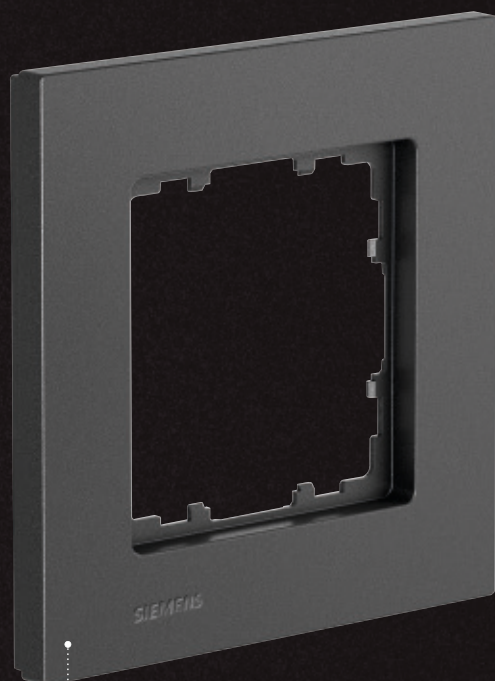

Frame

Select and long-lasting materials. Exclusive and high-quality finishes.




Switch

Accurate operation. Smooth and comfortable to the touch.

Table for composing basic functions - Miro

	● Polar white		● Aluminium metallic		● Carbon metallic		● Matt white		● Matt black	
Function	Mechanism	Switch/ Cover	Mechanism	Switch/ Cover	Mechanism	Switch/ Cover	Mechanism	Switch/ Cover	Mechanism	Switch/ Cover
One-way switch	18505	5TG62705WH00	18505	5TG62705AM00	18505	5TG62705CM00	18505	5TG62705SW00	18505	5TG62705SB00
Two-way switch	18506	5TG62705WH00	18506	5TG62705AM00	18506	5TG62705CM00	18506	5TG62705SW00	18506	5TG62705SB00
Intermediate switch	18507	5TG62705WH00	18507	5TG62705AM00	18507	5TG62705CM00	18507	5TG62705SW00	18507	5TG62705SB00
Double one-way switch	18509	5TG62701WH00	18509	5TG62701AM00	18509	5TG62701CM00	18509	5TG62701SW00	18509	5TG62701SB00
Double two-way switch	18510	5TG62701WH00	18510	5TG62701AM00	18510	5TG62701CM00	18510	5TG62701SW00	18510	5TG62701SB00
Bell push-button	18516	5TG62705WH10	18516	5TG62705AM10	18516	5TG62705CM10	18516	5TG62705SW10	18516	5TG62705SB10
Bulb push-button	18516	5TG62705WH20	18516	5TG62705AM20	18516	5TG62705CM20	18516	5TG62705SW20	18516	5TG62705SB20
Dimmer	21549-X	5TC89000WH	21549-X	5TC89000AM	21549-X	5TC89000CM	21549-X	5TC89000SW	21549-X	5TC89000SB
Schuko® socket	18524	5UH10724WH	18524	5UH10724AM	18524	5UH10724CM	18524	5UH10724SW	18524	5UH10724SB
Schuko® + double USB Type A and Type C socket	18524-USBC	5UH10725WH10	18524-USBC	5UH10725AM10	18524-USBC	5UH10725CM10	18524-USBC	5UH10725SW10	18524-USBC	5UH10725SB10
TV/FM socket outlet	5TG25610WH		5TG1253		5TG1223		5TG25610SW		5TG25610SB	
Adapter for 1 RJ connector	19582-1	5TG20782WH01	19582-1	5TG20782AM01	19582-1	5TG20782CM01	19582-1	5TG20782SW01	19582-1	5TG20782SB01
Adapter for 2 RJ connectors	19682-1	5TG20782WH02	19682-1	5TG20782AM02	19682-1	5TG20782CM02	19682-1	5TG20782SW02	19682-1	5TG20782SB02
Blank cover	5TG25580WH		5TG1250		5TG1220		5TG25580SW		5TG25580SB	
Cable output	5TG25660WH		5TG1251		5TG1221		5TG25660SW		5TG25660SB	
Buzzer	5TG98758WH	5TG20080WH	5TG98758AM	5TG2094	5TG98758CM	5TG2096	5TG98758WH	5TG20080SW	5TG98758CM	5TG20080SB
Key card switch	5TG48200WH		5TG4821		5TG4822		5TG48200SW		5TG48200SB	
Frame	5TG11110WH		5TG11111		5TG11112		5TG11110SW		5TG11110SB	

Switches



One-way switch **18505***
Two-way switch **18506***
 16 A 250 V~
Intermediate switch **18507***
 10 A 250 V~


Packing 10

ROCKER				
POLAR WHITE 5TG6270-5WH00	ALUMINIUM M. 5TG6270-5AM00	CARBON M. 5TG6270-5CM00	MATT WHITE 5TG6270-5SW00	MATT BLACK 5TG6270-5SB00
Equivalent ref. 59705-WH	59705-AM	59705-CM	59705-SW	59705-SB
Packing 10	10	10	1	1

ROCKER				
with bright chrome embellisher			with matt nickel embellisher	
POLAR WHITE 5TG6270-5CW00	ALUMINIUM M. 5TG6270-5CA00	CARBON M. 5TG6270-5CC00	MATT WHITE 5TG6270-5CS00	MATT BLACK 5TG6270-5CB00
Equivalent ref. 59705-CW	59705-CA	59705-CC	59705-CS	59705-CB
Packing 10	10	10	1	1

ROCKER WITH LENS				
POLAR WHITE 5TG6270-5WH01	ALUMINIUM M. 5TG6270-5AM01	CARBON M. 5TG6270-5CM01	MATT WHITE 5TG6270-5SW01	MATT BLACK 5TG6270-5SB01
Equivalent ref. 59705-WHL	59705-AML	59705-CML	59705-SWL	59705-SBL
Packing 10	2	2	1	1

ROCKER WITH LENS				
with bright chrome embellisher			with matt nickel embellisher	
POLAR WHITE 5TG6270-5CW01	ALUMINIUM M. 5TG6270-5CA01	CARBON M. 5TG6270-5CC01	MATT WHITE 5TG6270-5CS01	MATT BLACK 5TG6270-5CB01
Equivalent ref. 59705-CWL	59705-CAL	59705-CCL	59705-CSL	59705-CBL
Packing 10	2	2	1	1



One-way switch with control light **18605***
Two-way switch with control light **18606***
Two-way switch with indicator light **18506-L***
 16 A 250 V~

Packing 10

Neon lamp incorporated in reference 18506-L


ROCKER WITH LENS				
POLAR WHITE 5TG6270-5WH01	ALUMINIUM M. 5TG6270-5AM01	CARBON M. 5TG6270-5CM01	MATT WHITE 5TG6270-5SW01	MATT BLACK 5TG6270-5SB01
Equivalent ref. 59705-WHL	59705-AML	59705-CML	59705-SWL	59705-SBL
Packing 10	2	2	1	1

ROCKER WITH LENS				
with bright chrome embellisher			with matt nickel embellisher	
POLAR WHITE 5TG6270-5CW01	ALUMINIUM M. 5TG6270-5CA01	CARBON M. 5TG6270-5CC01	MATT WHITE 5TG6270-5CS01	MATT BLACK 5TG6270-5CB01
Equivalent ref. 59705-CWL	59705-CAL	59705-CCL	59705-CSL	59705-CBL
Packing 10	2	2	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

* The Siemens Miro and Style series are compatible with inserts manufactured from January 2017 onwards.

Switches



2 pole one-way switch **18508***
Only rockers with **18608***
indicator light
 16 A 250 V~
 Only rockers with indicator light

Packing 10


Neon lamp incorporated in reference 18608

		ROCKER WITH I / O				
		POLAR WHITE 5TG6270-5WH40	ALUMINIUM M. 5TG6270-5AM40	CARBON M. 5TG6270-5CM40	MATT WHITE 5TG6270-5SW40	MATT BLACK 5TG6270-5SB40
Equivalent ref.		59708-WH	59708-AM	59708-CM	59708-SW	59708-SB
Packing		2	2	2	1	1
		ROCKER WITH I / O				
		with bright chrome embellisher			with matt nickel embellisher	
		POLAR WHITE 5TG6270-5CW40	ALUMINIUM M. 5TG6270-5CA40	CARBON M. 5TG6270-5CC40	MATT WHITE 5TG6270-5CS40	MATT BLACK 5TG6270-5CB40
Equivalent ref.		59708-CW	59708-CA	59708-CC	59708-CS	59708-CB
Packing		2	2	2	1	1
		ROCKER WITH I / O AND LENS				
		POLAR WHITE 5TG6270-5WH41	ALUMINIUM M. 5TG6270-5AM41	CARBON M. 5TG6270-5CM41	MATT WHITE 5TG6270-5SW41	MATT BLACK 5TG6270-5SB41
Equivalent ref.		59708-WHL	59708-AML	59708-CML	59708-SWL	59708-SBL
Packing		2	2	2	1	1
		ROCKER WITH I / O AND LENS				
		with bright chrome embellisher			with matt nickel embellisher	
		POLAR WHITE 5TG6270-5CW41	ALUMINIUM M. 5TG6270-5CA41	CARBON M. 5TG6270-5CC41	MATT WHITE 5TG6270-5CS41	MATT BLACK 5TG6270-5CB41
Equivalent ref.		59708-CWL	59708-CAL	59708-CCL	59708-CSL	59708-CBL
Packing		2	2	2	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

* The Siemens Miro and Style series are compatible with inserts manufactured from January 2017 onwards.

Switches



Double one-way switch **18509***
Double two-way switch **18510***
 16 A 250 V~
Double push-button **18511***
 10 A 250 V~
Double push-button, normally-closed **18513***
 10 A 250 V~

Packing 10

DOUBLE ROCKER



	POLAR WHITE 5TG6270-1WH00	ALUMINIUM M. 5TG6270-1AM00	CARBON M. 5TG6270-1CM00	MATT WHITE 5TG6270-1SW00	MATT BLACK 5TG6270-1SB00
Equivalent ref.	59709-WH	59709-AM	59709-CM	59709-SW	59709-SB
Packing	10	10	10	1	1

DOUBLE ROCKER

with bright chrome embellisher

with matt nickel embellisher



	POLAR WHITE 5TG6270-1CW00	ALUMINIUM M. 5TG6270-1CA00	CARBON M. 5TG6270-1CC00	MATT WHITE 5TG6270-1CS00	MATT BLACK 5TG6270-1CB00
Equivalent ref.	59709-CW	59709-CA	59709-CC	59709-CS	59709-CB
Packing	10	10	10	1	1

DOUBLE ROCKER WITH LENS



	POLAR WHITE 5TG6270-1WH01	ALUMINIUM M. 5TG6270-1AM01	CARBON M. 5TG6270-1CM01	MATT WHITE 5TG6270-1SW01	MATT BLACK 5TG6270-1SB01
Equivalent ref.	59709-WHL	59709-AML	59709-CML	59709-SWL	59709-SBL
Packing	10	2	2	1	1

DOUBLE ROCKER WITH LENS

with bright chrome embellisher

with matt nickel embellisher



	POLAR WHITE 5TG6270-1CW01	ALUMINIUM M. 5TG6270-1CA01	CARBON M. 5TG6270-1CC01	MATT WHITE 5TG6270-1CS01	MATT BLACK 5TG6270-1CB01
Equivalent ref.	59709-CWL	59709-CAL	59709-CCL	59709-CSL	59709-CBL
Packing	10	2	2	1	1

Double push-button with lamp **18511-L***
 10 A 250 V~

Packing 10

Neon lamp incorporated in reference 18511-L

DOUBLE ROCKER WITH LENS



	POLAR WHITE 5TG6270-1WH01	ALUMINIUM M. 5TG6270-1AM01	CARBON M. 5TG6270-1CM01	MATT WHITE 5TG6270-1SW01	MATT BLACK 5TG6270-1SB01
Equivalent ref.	59709-WHL	59709-AML	59709-CML	59709-SWL	59709-SBL
Packing	10	2	2	1	1

DOUBLE ROCKER WITH LENS

with bright chrome embellisher

with matt nickel embellisher




	POLAR WHITE 5TG6270-1CW01	ALUMINIUM M. 5TG6270-1CA01	CARBON M. 5TG6270-1CC01	MATT WHITE 5TG6270-1CS01	MATT BLACK 5TG6270-1CB01
Equivalent ref.	59709-CWL	59709-CAL	59709-CCL	59709-CSL	59709-CBL
Packing	10	2	2	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).











* The Siemens Miro and Style series are compatible with inserts manufactured from January 2017 onwards.

Switches



**Two-way switch
+ Push-button**
16 A + 10 A 250 V~
Packing 10


18515*

		DOUBLE ROCKER DOBL, BELL SYMBOL				
						
		POLAR WHITE 5TG6270-1WH10	ALUMINIUM M. 5TG6270-1AM10	CARBON M. 5TG6270-1CM10	MATT WHITE 5TG6270-1SW10	MATT BLACK 5TG6270-1SB10
Equivalent ref.		59715-WH	59715-AM	59715-CM	59715-SW	59715-SB
Packing		2	2	2	1	1
		DOUBLE ROCKER DOBLE WITH CHROME EMBELLISHER, BELL SYMBOL				
		with bright chrome embellisher		with matt nickel embellisher		
						
		POLAR WHITE 5TG6270-1CW10	ALUMINIUM M. 5TG6270-1CA10	CARBON M. 5TG6270-1CC10	MATT WHITE 5TG6270-1CS10	MATT BLACK 5TG6270-1CB10
Equivalent ref.		59715-CW	59715-CA	59715-CC	59715-CS	59715-CB
Packing		2	2	2	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

* The Siemens Miro and Style series are compatible with inserts manufactured from January 2017 onwards.

Push-buttons



Push-button normally-open 18516*
Push-button normally-closed 18512*
 10 A 250 V~

Packing 10

Note:
 Pictograms can be added
 on request



ROCKER BELL / BULB SYMBOL



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG6270-5WH10	5TG6270-5AM10	5TG6270-5CM10	5TG6270-5SW10	5TG6270-5SB10
Equivalent ref.	59716-WH	59716-AM	59716-CM	59716-SW	59716-SB
Packing	10	10	10	1	1
	5TG6270-5WH20	5TG6270-5AM20	5TG6270-5CM20	5TG6270-5SW20	5TG6270-5SB20
Equivalent ref.	59717-WH	59717-AM	59717-CM	59717-SW	59717-SB
Packing	10	10	10	1	1

ROCKER BELL / BULB SYMBOL

with bright chrome embellisher

with matt nickel embellisher



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG6270-5CW10	5TG6270-5CA10	5TG6270-5CC10	5TG6270-5CS10	5TG6270-5CB10
Equivalent ref.	59716-CW	59716-CA	59716-CC	59716-CS	59716-CB
Packing	10	10	10	1	1
	5TG6270-5CW20	5TG6270-5CA20	5TG6270-5CC20	5TG6270-5CS20	5TG6270-5CB20
Equivalent ref.	59717-CW	59717-CA	59717-CC	59717-CS	59717-CB
Packing	10	10	10	1	1

ROCKER WITH LENS BELL / BULB SYMBOL



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG6270-5WH11	5TG6270-5AM11	5TG6270-5CM11	5TG6270-5SW11	5TG6270-5SB11
Equivalent ref.	59716-WHL	59716-AML	59716-CML	59716-SWL	59716-SBL
Packing	10	2	2	1	1
	5TG6270-5WH21	5TG6270-5AM21	5TG6270-5CM21	5TG6270-5SW21	5TG6270-5SB21
Equivalent ref.	59717-WHL	59717-AML	59717-CML	59717-SWL	59717-SBL
Packing	10	10	10	1	1

ROCKER WITH LENS BELL / BULB SYMBOL

with bright chrome embellisher

with matt nickel embellisher




	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG6270-5CW11	5TG6270-5CA11	5TG6270-5CC11	5TG6270-5CS11	5TG6270-5CB11
Equivalent ref.	59716-CWL	59716-CAL	59716-CCL	59716-CSL	59716-CBL
Packing	10	2	2	1	1
	5TG6270-5CW21	5TG6270-5CA21	5TG6270-5CC21	5TG6270-5CS21	5TG6270-5CB21
Equivalent ref.	59717-CWL	59717-CAL	59717-CCL	59717-CSL	59717-CBL
Packing	10	10	10	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

* The Siemens Miro and Style series are compatible with inserts manufactured from January 2017 onwards.

Push-buttons



Push-button with timed switch and indicator light 18599*

Push-button with timed switch and indicator light

Power supply voltage: 230V~ 50Hz

Consumption: 5VA

Loads:

- Incandescent and halogen 230V: 40 - 400W
 - Halogen lamps with ferromagnetic transformer: 50 - 320W
 - Halogen lamps with electronic transformer: 40 - 400W
 - Motors: 36-100W 10 min.
- Time adjustable from 30s to 10min
Packing 1

ROCKER WITH LENS, BULB SYMBOL



	POLAR WHITE 5TG6270-5WH21	ALUMINIUM M. 5TG6270-5AM21	CARBON M. 5TG6270-5CM21	MATT WHITE 5TG6270-5SW21	MATT BLACK 5TG6270-5SB21
Equivalent ref.	59717-WHL	59717-AML	59717-CML	59717-SWL	59717-SBL
Packing	10	10	10	1	1

ROCKER WITH LENS, BULB SYMBOL

with bright chrome embellisher

with matt nickel embellisher



	POLAR WHITE 5TG6270-5CW21	ALUMINIUM M. 5TG6270-5CA21	CARBON M. 5TG6270-5CC21	MATT WHITE 5TG6270-5CS21	MATT BLACK 5TG6270-5CB21
Equivalent ref.	59717-WHL	59717-AML	59717-CML	59717-CSL	59717-CBL
Packing	10	10	10	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

* The Siemens Miro and Style series are compatible with inserts manufactured from January 2017 onwards.

Electronic timer switches



Adjustable electronic timer switch

2382

Power supply voltage: 230V~ 50Hz
Consumption: 5VA

Loads:

- Incandescent and halogen 230V: 40 - 400W
- Halogen lamps with ferromagnetic transformer: 50 - 320W
- Halogen lamps with electronic transformer: 40 - 400W
- Motors: 36-100W

Time adjustable from 30s to 10 min

Packing 1

Note:
Pictograms can be added
on request



Key card switches

Key card switch with lighted labelling field

Mechanical operation, 1 push-button, normally-open with separated neutral terminal.

For cards up to 54x65 mm and 0.7-1.0 mm thick.

Includes lamp for indicator light.



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
Equivalent ref.	5TG4820-OWH	5TG4821	5TG4822	5TG4820-OSW	5TG4820-OSB
Packing	59068-WH 1	59068-AM 1	59068-CM 1	59068-SW 1	59068-SB 1

Indicator lights



Blue LED indicator light

18039-1AZ

230 V~

Indicator light for 2 pole one-way switches and single pole one-way switches with control light
Wide rocker

Packing 18039-1AZ = 5



Blue LED indicator light

18039-2AZ

230 V~

Indicator lights for one-way switches, two-way switches, intermediate switches and push-buttons.
Wide rocker

Packing 18039-2AZ = 10



Blue LED indicator light

18039-3AZ

230 V~

Indicator lights for all different kind of inserts
Narrow rocker

Packing 18039-3AZ = 10




Load for indicator lights with energy saving and fluorescent lamps

3139

Packing 1

Insert for blinds



Double push-button for blinds 18565*

Double switch for blinds 18569*

With electrical and mechanical interlocking device
10 A 250 V~

Packing 10

Double push-button 18511*

Suitable for connecting any blind control device
No interlocking device
10 A 250 V~

Packing 10

DOUBLE ROCKER FOR BLINDS



POLAR WHITE ALUMINIUM M. CARBON M. MATT WHITE MATT BLACK


5TG6276-5WH00 5TG6276-5AM00 5TG6276-5CM00 5TG6276-5SW00 5TG6276-5SB00

Equivalent ref.	59765-WH	59765-AM	59765-CM	59765-SW	59765-SB
Packing	10	2	2	1	1

DOUBLE ROCKER FOR BLINDS

with bright chrome embellisher

with matt nickel embellisher



POLAR WHITE ALUMINIUM M. CARBON M. MATT WHITE MATT BLACK

5TG6276-5CW00 5TG6276-5CA00 5TG6276-5CC00 5TG6276-5CS00 5TG6276-5CB00

Equivalent ref.	59765-CW	59765-CA	59765-CC	59765-CS	59765-CB
Packing	10	2	2	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

* The Siemens Miro and Style series are compatible with inserts manufactured from January 2017 onwards.

Blinds control



Blind control to be installed in a flush-mounting box

5TC1272

Blinds controller for 230 V motors


Max power: 1250 VA

Local or centralised operating

Drive time adjustable from 1 to 120 sec.


Packing 1

Dimmers



Two-way dimmer for RL loads (60 to 600 W) **21539-X**
 Two-way dimmer for incandescent (R), direct halogen (R) 60-600 W and halogen 12 V low voltage with ferromagnetic transformer (L) 25-500 VA.
 Fuse T 4 H 250 V
 Switch on / off by pressing
 Screw or claw fixing

Packing 1




Two-way dimmer for RC loads (60 to 800 W) **21542-X**
 Two-way dimmer for incandescent (R), direct halogen (R) 60-800 W and low voltage halogens with electronic transformer (C) 20 to -800 VA
 Switch on / off by pressing
 Screw or claw fixing
 Electronic protection against short circuits

Packing 1



Electronic potentiometer for fluorescent lamps **21543-X**
 1 to 10 Vdc
 Potentiometer for fluorescent lamps with adjustable electronic ballast 920 VA, 50 mA (10 VDC)
 Maximum control current: 50 mA, 230 V, 4 A
 Fuse T 4 H 250 V
 Switch on / off by pressing. Screw or claw fixing

Packing 1



Two-way dimmer for LED lamps 230 Vac **21549-X**
 LED Lamps 6-60 W, incandescent, direct halogen (R) 6-120 W halogen 12 V low voltage with ferromagnetic transformer (L) 25-100 VA.
 Switch on / off by pressing
 1.6 Fuse T H 250 V.
 Screw or claw fixing
 List of compatibility-tested LED lamps is available at: www.bjces.com/documentation

Packing 1

COVER AND BUTTON



POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
5TC8900-0WH	5TC8900-0AM	5TC8900-0CM	5TC8900-0SW	5TC8900-0SB
59749-WH	59749-AM	59749-CM	59749-SW	59749-SB
1	1	1	1	1

Equivalent ref.
Packing

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

Dimmers



Universal RLC dimmer

2385

Power supply voltage: 230V ~ 50Hz.
Consumption: 3VA.
Loads:
• Incandescent and halogen lamps (230V): 15 - 400W.
• Halogen Lamps with inductive transformer: 20 - 250W.
• Halogen lamps with electronic transformer: 15 - 400W.

Packing 1



Dimmer for LED lamps

2386

Power supply voltage: 230V ~ 50/60Hz.
Consumption: 2VA.
Valid for adjustable LED lamps:
• to 230V ~: 4-100W
• To 12V ~ with adjustable electronic transformer (1 lamp/ transformer): maximum 6 transformers (50W).

Packing 1



Dimmer for LED strip, monochrome (12-48 Vdc)

2387

Power supply voltage: 12 - 48V CC.
Consumption: <12mA.
Maximum Load 8A.
Minimum regulation level: 1% - 60%.
Regulation speed 0% to 100%: 3 - 10 s.

Packing 1



Dimmer for adjustable compact fluorescent lamps

2388

Power supply voltage: 230V ~ 50Hz.
Consumption: 3VA.
Load: min.20 - Max.200W.


Packing 1

Load connection

LOAD TYPE								
21539-X	Rotary	60-600 W	25-500 VA	NO	NO	NO	NO	NO
21542-X	Rotary	60-800 W	NO	60-800 VA	NO	NO	NO	NO
21543-X	Rotary	NO	NO	NO	NO	NO	NO	920 VA 50 mA (10 V _{DC})
21549-X	Rotary	6-120 W	25-100 VA	NO	6-60 W	NO	NO	NO
2385	By push-button	15-400 W	20-250 VA	15-400 VA	NO	NO	NO	NO
2386	By push-button	NO	NO	4-300 W	4-100 W	NO	NO	NO
2387 *	By push-button	NO	NO	NO	NO	Maximum 8 A	NO	NO
2388	By push-button	NO	NO	NO	NO	NO	20 W - 200 W	NO

* 2387. The dimmer must be installed along with the 230Vac 12-48Vdc transformer that carries the LED strip. A list of compatibility-tested LED lamps is available at www.bj.es/documentation


Socket outlets with increased touch protection



Schuko® socket outlet with increased touch protection **18524**
Screwed terminals
16 A 250 V~

Packing 10

SOCKET OUTLET COVER				
POLAR WHITE 5UH1072-4WH	ALUMINIUM M. 5UH1072-4AM	CARBON M. 5UH1072-4CM	MATT WHITE 5UH1072-4SW	MATT BLACK 5UH1072-4SB
Equivalent ref. Packing	59724-WH 10	59724-AM 10	59724-CM 10	59724-SW 1 59724-SB 1




Schuko® socket outlet 2P+E with double USB **18524-USBC** **NEW**
type A and type C charger with fast charging with increased touch protection

Schuko® socket:
- 230Vac 50Hz, 16A
- Screwless terminal
Double USB charger:
- 1 USB Type A socket and 1 USB Type C socket.
- Maximum power: 20W
- Quick charge Power Delivery USB C: 5V/3A; 9V/2.22A; 12V/1.67A
- Quick charge USB A fast charging: 5V/3A; 9V/2.22A; 12V/1.67A
- Normal charging:
· 5V/3.4A when using USB A and USB C at the same time
· 5V/2.4A when using USB A or USB C individually
- Short circuit protection
- Temperature protection

According to UNE 20315-1-1/1/1-2 and EN 62368-1 standards

Packing 1

SCHUKO® SOCKET OUTLET COVER				
POLAR WHITE 5UH1072-5WH10	ALUMINIUM M. 5UH1072-5AM10	CARBON M. 5UH1072-5CM10	MATT WHITE 5UH1072-5SW10	MATT BLACK 5UH1072-5SB10
Equivalent ref. Packing	59724-USBC-WH 1 NEW	59724-USBC-AM 1 NEW	59724-USBC-CM 1 NEW	59724-USBC-SW 1 NEW 59724-USBC-SB 1 NEW



Schuko® socket outlet with screw-less terminals with claws **5UB1101-5B**
Schuko® socket outlet with screw-less terminals without claws **5UB1101-5KK**

For flexible or rigid 2.5mm cable

Packing 10


SCHUKO® SOCKET OUTLET COVER					
POLAR WHITE 5UH1073-2WH	ALUMINIUM M. 5UH1073-2AM	CARBON M. 5UH1073-2CM	MATT WHITE 5UH1073-2SW	MATT BLACK 5UH1073-2SB	ROJO 5UH1073-2RD
Equivalent ref. Packing	59732-WH 10	59732-AM 10	59732-CM 10	59732-SW 1 59732-SB 1	59732-RD 1

SCHUKO® SOCKET OUTLET COVER WITH LABELLING FIELD		
POLAR WHITE 5UH1073-2WH01	ALUMINIUM M. 5UH1073-2AM01	CARBON M. 5UH1073-2CM01
Equivalent ref. Packing	- 1	- 1

SCHUKO® SOCKET OUTLET COVER WITH LABELLING FIELD AND OPERATING INDICATOR		
POLAR WHITE 5UH1073-2WH11	ALUMINIUM M. 5UH1073-2AM11	CARBON M. 5UH1073-2CM11
Equivalent ref. Packing	- 1	- 1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

Socket outlets with increased touch protection



Schuko® socket outlet with screw-less terminals with claws **5UB1101-5B**
Schuko® socket outlet with screw-less terminals without claws **5UB1101-5KK**
 For flexible or rigid 2.5mm cable
 Packing 10

SOCKET OUTLET COVER WITH HINGED LID



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
Equivalent ref.	5UH1088-4WH	5UH1088-4AM	5UH1088-4CM	5UH1088-4SW	5UH1088-4SB
Packing	59814-WH 1	59814-AM 1	59814-CM 1	59814-SW 1	59814-SB 1

SOCKET OUTLET COVER WITH HINGED LID AND LABELLING FIELD



	POLAR WHITE	ALUMINIUM M.	CARBON M.
Packing	5UH1088-4WH01 2	5UH1088-4AM01 1	5UH1088-4CM01 1

SOCKET OUTLET COVER WITH LOCKABLE HINGED LID




	POLAR WHITE	ALUMINIUM M.	CARBON M.
Packing	5UH1073-2WH21 1	5UH1073-2AM21 1	5UH1073-2CM21 1



IP44 sealing kit for Schuko® socket outlets with hinged lid **5TG4318**
 Miro and Style
 Packing 1



Lamp for Schuko® socket outlet with operating indicator **5TG7304**
 1,5 mA, 230 V AC/ 50 Hz
 Packing 1



2 pole socket outlet with earth pin (French/Belgian standard) with increased touch protection **18572**
 Screwed terminals 16 A 250 V~
 Packing 10

SOCKET OUTLET COVER FOR FRENCH/BELGIAN STANDARD



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
Equivalent ref.	5UH1077-2WH	5UH1077-2AM	5UH1077-2CM	5UH1077-2SW	5UH1077-2SB
Packing	59772-WH 10	59772-AM 10	59772-CM 10	59772-SW 1	59772-SB 1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

IP44 switch solutions




- One-way switch** **5TA2151**
- Two-way switch 16A** **5TA2156**
- Intermediate switch** **5TA2117**
- Pushbutton, 1 NO contact** **5TD2120**
- Pushbutton, 1 CO contact** **5TD2123**

Packing 1

For IP44 protection use of seal 5TG4324 is needed.

ROCKER			
POLAR WHITE 5TG6201-0WH00	ALUMINIUM M. 5TG6241	CARBON M. 5TG6221	MATT BLACK 5TG6201-0SB00
Packing 1	1	1	1

These rockers are only suitable for IP44 (together with the corresponding seal) being used with the above indicated inserts. They are not suitable for MEC18 inserts




- Pushbutton, 1 NO contact** **5TD2120**
- Pushbutton, 1 CO contact** **5TD2123**

Packing 1

For IP44 protection use of seal 5TG4324 is needed.

ROCKER WITH BELL SYMBOL			
POLAR WHITE 5TG6201-0WH10	ALUMINIUM M. 5TG6247	CARBON M. 5TG6227	MATT BLACK 5TG6201-0SB10
Packing 1	1	1	1
Bulb logo 5TG6201-0WH20	ALUMINIUM M. 5TG6201-0AM20	CARBON M. 5TG6201-0CM20	MATT BLACK 5TG6201-0SB20
Packing 1	1	1	1
Bulb logo and lens 5TG6201-0WH21	ALUMINIUM M. 5TG6246	CARBON M. 5TG6226	MATT BLACK 5TG6201-0SB21
Packing 1	1	1	1

These rockers are only suitable for IP44 (together with the corresponding seal) being used with the above indicated inserts. They are not suitable for MEC18 inserts




- ON/OFF switch, 2-pole, 10 A** **5TA2112**
- ON/OFF switch, 2-pole, 16 A** **5TA2162**
- ON/OFF switch, 3-pole, 16 A** **5TA2153**

Packing 1

For IP44 protection use of seal 5TG4324 is needed.

ROCKER WITH I/O SYMBOLS			
POLAR WHITE 5TG6201-0WH40	ALUMINIUM M. 5TG6242	CARBON M. 5TG6222	MATT BLACK 5TG6201-0SB40
Packing 1	1	1	1

These rockers are only suitable for IP44 (together with the corresponding seal) being used with the above indicated inserts. They are not suitable for MEC18 inserts



- Two-circuit switch** **5TA2155**
- Double two-way switch** **5TA2118**
- Pushbutton, double, 1 NO contact, 1 CO contact** **5TD2115**
- Pushbutton, double, 2 NO contacts** **5TD2111**

Packing 1

For IP44 protection use of seal 5TG4324 is needed.

DOUBLE ROCKER			
POLAR WHITE 5TG6205-0WH00	ALUMINIUM M. 5TG6245	CARBON M. 5TG6225	MATT BLACK 5TG6205-0SB00
Packing 1	1	1	1

These rockers are only suitable for IP44 (together with the corresponding seal) being used with the above indicated inserts. They are not suitable for MEC18 inserts



- Shutter/blind switch, with electrical and mechanical interlock** **5TA2154**
- Shutter/blind pushbutton, with electrical interlock** **5TA2114**

Packing 1

For IP44 protection use of seal 5TG4324 is needed.

DOUBLE ROCKER FOR BLINDS			
POLAR WHITE 5TG6214-0WH00	ALUMINIUM M. 5TG6254	CARBON M. 5TG6234	MATT BLACK 5TG6214-0SB00
Packing 1	1	1	1

These rockers are only suitable for IP44 (together with the corresponding seal) being used with the above indicated inserts. They are not suitable for MEC18 inserts




- IP44 set of seals, for inserts** **5TG4324**

Suitable for use only in conjunction with inserts and rockers in this page.

Packing 1

IP44 socket outlet solutions



Schuko® socket outlet with screw-less terminals with claws **5UB1101-5B**

Schuko® socket outlet with screw-less terminals without claws **5UB1101-5KK**

For flexible or rigid 2.5mm cable

Packing 10

For IP44 protection use of seal 5TG4318 is needed.

SCHUKO® SOCKET OUTLET COVER WITH HINGED LID



POLAR WHITE ALUMINIUM M. CARBON M. MATT WHITE MATT BLACK

5UH1088-4WH **5UH1088-4AM** **5UH1088-4CM** **5UH1088-4SW** **5UH1088-4SB**

59814-WH 59814-AM 59814-CM 59814-SW 59814-SB

Equivalent ref.
Packing

SCHUKO® SOCKET OUTLET COVER WITH HINGED LID AND LABELLING FIELD



POLAR WHITE ALUMINIUM M. CARBON M.
5UH1088-4WH01 **5UH1088-4AM01** **5UH1088-4CM01**

Packing

SCHUKO® SOCKET OUTLET COVER WITH LABELLING FIELD AND OPERATING INDICATOR



POLAR WHITE ALUMINIUM M. CARBON M.
5UH1073-2WH21 **5UH1073-2AM21** **5UH1073-2CM21**

Packing




IP 44 sealing kit **5TG4318**
for Schuko® socket outlets with hinged lid

Miro and Style

Packing 1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

TV-FM-R/TV-SAT Socket outlets



TV-FM socket outlet
Series 2-10 **2932**
Final outlet **2933**
Individual installation **2934**
 (Manufacturer TELEVÉS)


Packing 10
 TV-FM socket outlets are according to UNE 20523 and CEI 169-2 standards

Equivalent ref.
 Packing

R/TV - SAT COVER 2 OUTLETS




POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
5TG2561-0WH	5TG1253	5TG1223	5TG2561-0SW	5TG2561-0SB
59330-WH	59330-AM	59330-CM	59330-SW	59330-SB
10	1	1	1	1



R/TV-SAT socket with 2 outlets
Series 6-12 **2921**
Series 2-5 **2922**
Final outlet **2923**
Individual installation **2924**
 (Manufacturer TELEVÉS)

Packing 10
 R/TV-SAT socket outlets are according to UNE 20523 and CEI 169-2 standards



R/TV-SAT socket with 3 outlets **2918**
Individual installation
 (Manufacturer TELEVÉS)

Packing 1
 R/TV-SAT socket outlets conform to UNE-20523 and CEI 169-2 standards

Equivalent ref.
 Packing


R/TV - SAT COVER 3 OUTLETS



POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
5TG2548-2WH	5TG1252-2	5TG1222-2	5TG2548-2SW	5TG2548-2SB
59341-WH	59341-AM	59341-CM	59341-SW	59341-SB
1	1	1	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

Voice and Data connectors and adapters, Type RJ



**Adapter for
1 RJ45/RJ11 connector
(AMP, ITT, etc.)**

19582-1


Packing 10

COVERS FOR 1 RJ CONNECTOR OR FIBRE



Equivalent ref.
Packing

POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
5TG2078-2WH01	5TG2078-2AM01	5TG2078-2CM01	5TG2078-2SW01	5TG2078-2SB01
59782-WH	59782-AM	59782-CM	59782-SW	59782-SB
10	1	1	1	1



**Adapter for
2 RJ11/RJ45 connectors**

19682-1

Packing 10

COVERS FOR DOUBLE RJ CONNECTOR OR FIBRE



Equivalent ref.
Packing

POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
5TG2078-2WH02	5TG2078-2AM02	5TG2078-2CM02	5TG2078-2SW02	5TG2078-2SB02
59882-WH	59882-AM	59882-CM	59882-SW	59882-SB
1	1	1	1	1



Keystone RJ45 connector Cat 6

3186-B

Cat. 6
White

Packing 25



Adapter with RJ11 connector
Tool-less connection

19582

Packing 10

COVERS FOR 1 RJ CONNECTOR OR FIBRE



Equivalent ref.
Packing

POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
5TG2078-2WH01	5TG2078-2AM01	5TG2078-2CM01	5TG2078-2SW01	5TG2078-2SB01
59782-WH	59782-AM	59782-CM	59782-SW	59782-SB
10	1	1	1	1



**Adapter with RJ45 connector
Cat 5E (ISO 8877)**

19595


Packing 10



**Adapter with RJ45 connector
Cat 6**
Tool-less connection

18586

Packing 10



**Adapter with 2 RJ45 connectors
Cat. 6**
Tool-less connection

18586-2

Packing 1

COVERS FOR DOUBLE RJ CONNECTOR OR FIBRE




Equivalent ref.
Packing

POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
5TG2078-2WH02	5TG2078-2AM02	5TG2078-2CM02	5TG2078-2SW02	5TG2078-2SB02
59882-WH	59882-AM	59882-CM	59882-SW	59882-SB
1	1	1	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

SC/APC fiber optic solutions



Adapter for 1 RJ connector standart Keystone


19582-1

Packing 10

COVERS FOR 1 RJ CONNECTOR OR FIBRE



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
Equivalent ref.	5TG2078-2WH01	5TG2078-2AM01	5TG2078-2CM01	5TG2078-2SW01	5TG2078-2SB01
Packing	10	1	1	1	1



Adapter for 2 RJ connectors standart Keystone

19682-1

Packing 10

COVERS FOR DOUBLE RJ CONNECTOR OR FIBRE



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
Equivalent ref.	5TG2078-2WH02	5TG2078-2AM02	5TG2078-2CM02	5TG2078-2SW02	5TG2078-2SB02
Packing	1	1	1	1	1



Coupler for optical fibre connector Type SC/APC

3191

To be used with adapter 3190 or directly plugged in the RJ cover.
To be installed in increased depth flush-mounting box in order to respect the minimum bending radius of the fibre optic according to norm

Packing 20



Keystone adapter to be used with the coupler 3191 in RJ adapters

3190

For a proper use of this adapter an increased depth flush-mounting box is recommended.

Packing 20

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

Voice and data connectors and adapters


Support plates for two computer connectors according to table.
Whitout claws

Packing 1



	Reference	Colour	Compatible connectors
	5TG2078	Red	<ul style="list-style-type: none"> - AMP-Type 216000-2 y 216005-4 - Krone MT-RJ 7023.1.303-xx, Cat. 6 STP 6830.1.312-xx, Cat. 6 UTP 6830.1.302-xx, Cat. 6 UTP 6830.1.800-xx, Cat. 6 UTP 6830.1.810-xx - Molex KSJ-00033-02/-04 - Radiall R 280 MOD 802/803/804/805/807 - Siemon MX-K-C5-80-ND/-02 ND - Telegärtner Cat.6 J00029A0036
	5TG2080	Black	<ul style="list-style-type: none"> - Leviton 41108, Cat. 5 - Panduit Keystone: KJ 688 Txx, Cat. 6, KJ 5e88 Txx, Cat. 5e - Brand Rex GPC Jack F01 3LF
	5TG2081	Yellow	<ul style="list-style-type: none"> - AMP-Tyco: 406372-x Cat. 5; 1116515-1 Cat. 5e; 1339015-1 Cat. 5e; 1375055-x Cat. 6; 1375187-x Cat. 6; 137188-1 Cat. 6; 1375189-1 Cat. 5e; 137190-x Cat. 5e; 137191-x Cat. 5e; 1375192-x Cat. 3 RJ11; 1375193-x Cat. 3 RJ11; 1116604-x Cat. 5e; 188650- 338038-1 .. 4; 1711342-1; MTRJ127841-1; MTRJ127842-1 - ASYCO Cat. 5e/6 SFTP - Kerpen E-Line 600 GG45 Cat. 6 Keystone clip Nr. 9ZE20009 - Nexans LENmark-MJ with keystone clip N429.620
	5TG2082	Orange	<ul style="list-style-type: none"> - Setec: SeSix 501244; UKJ 501292 - Rutenbeck 13900 300 - MMC: MK 6 NB; MK 6 AN; MK 6 FS - DANCHIEF 568 A/B, Cat. 5 - Radiall R280 MOD 809 y MOD 811 - Hubbel HXJ 5 EBU y UTP - BTR UTP 130 A 10 I
	5TG2083	Blue	<ul style="list-style-type: none"> - Krone Cat. 5 STP 6540.1.1 54.xx, Cat. 5; UTP 6540.1.130.xx; UTP 6540.1.100.xx
	5TG2084	Brown	<ul style="list-style-type: none"> - Siemon MX6-FS
	5TG2058	Green	<ul style="list-style-type: none"> - AVAYA Anixter Systimax (Lucent Techn.): M11...en M100 (uitloop), MPS100E Cat. 5, MPS200E + MGS 400 Cat. 6 - Gigaspeed: X10D MGS500, X10D MFP520 - R&M - R30511, -2, -3 y -4 with adapter 310694
	5TG2058-1	Transparent	To accommodate up to 2 Modular Lexcom Jack connectors.
	5TG2058-2	White	To accommodate up to 2 Modular Jack Plug-in Conn. Nordix/CDT 061110 ao 405302 + 3.
	5TG2058-3	Grey	To accommodate up to 2 Modular Lexcom Jack connectors.
	5TG2058-4	Silver	To accommodate up to 2 3M Volition modular jack connectors.
	5TG2098	Beige	<ul style="list-style-type: none"> - BTR: E-DAT module N°. 130910-I - Daetwyler: Unilan MS 1/8 Cat. 6 (equivalent to BTR jack)

Voice and data connectors and adapters



Adapter with RJ45 tilted connector Cat 6, shielded

Simple **5TG2026-1**
Double **5TG2026-2**

- Adjustable rear output cable (+/- 30°)
- LSA cable terminals 0.4 -0.63 mm Ø, AWG 26 -22
- Cat.6 / Class E according to DIN EN 60
- Connector tilted at 45°

Packing 1



Adapter with RJ45 tilted connector Cat 6, unshielded

Simple **5TG2027-1**
Double **5TG2027-2**

- LSA cable terminals 0.4 -0.63 mm Ø, AWG 26 -22
- Cat.6 / Class A according to ISO/IEC 11801:2011-06, DIN EN 50 173-1:2011-09, TIA/EIA-568-B.2-10 2008.
- Connector tilted at 45°

Packing 1

TITLED RJ CONNECTOR COVER, SINGLE/DOUBLE RUTENBECK



POLAR WHITE 5TG2545-0WH	ALUMINIUM M. 5TG1257	CARBON M. 5TG1227	MATT WHITE 5TG2545-0SW	MATT BLACK 5TG2545-0SB
-----------------------------------	--------------------------------	-----------------------------	----------------------------------	----------------------------------

Packing 1

TITLED RJ CONNECTOR COVER, SINGLE/DOUBLE RUTENBECK WITH LABELLING FIELD



POLAR WHITE 5TG2546-0WH	ALUMINIUM M. 5TG1258	CARBON M. 5TG1228
-----------------------------------	--------------------------------	-----------------------------

Packing 1

Multimedia connectors




Type-A HDMI connector

Screwed terminals

White
Beige
Grey

18578-HDMI
18578-HDMI-A
18578-HDMI-G

Packing 1



VGA connector


Maximum cable length 30 m.
(depending on the type of cables)

Screwed terminals

White
Beige
Grey

18578-VGA
18578-VGA-A
18578-VGA-G

Packing 1



Type-A USB connector

Compatible with USB 2.0

Screwed terminals

White
Beige
Grey

18578-USB
18578-USB-A
18578-USB-G

Packing 1



Double USB charger

5TG2025-3

- Input rated voltage: 100-250V AC
- Nominal frequency: 50-60Hz
- 2 x USB type A female
- Output rated voltage: 5 V DC
- Max. total current: 2,1A
- Consumption on standby: < 100mW
- complies with the ErP European Directive
- Short circuit protection
- Temperature protection

Standards and certificates: EN 62386-1

Packing 1

Check availability

COVER FOR MULTIMEDIA CONNECTORS



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
Equivalent ref.	5TG2563-2WH	5TG1256-2	5TG1226-2	5TG2563-2SW	5TG2563-2SB
Packing	59778-WH 1	59778-AM 1	59778-CM 1	59778-SW 1	59778-SB 1

COVER FOR DOUBLE USB CHARGER



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
Equivalent ref.	5TG2578-0WH	5TG2578-0AM	5TG2578-0CM	5TG2578-0SW	5TG2578-0SB
Packing	59780-WH 1	59780-AM 1	59780-CM 1	59780-SW 1	59780-SB 1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

Sound



Loudspeaker connectors

Single
Stereo

5TG2467-2
5TG2468-2

Packing 1

COVER FOR MULTIMEDIA CONNECTORS



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG2563-2WH	5TG1256-2	5TG1226-2	5TG2563-2SW	5TG2563-2SB
Equivalent ref.	59778-WH	59778-AM	59778-CM	59778-SW	59778-SB
Packing	1	1	1	1	1

EGI* adapter

0708.10 White

TEZ* adapter

TX82/BL (White)

TX82/MF (Ivory)

TX82/GR (Grey)

SONELCO* adapter

PCP9135-01 (White)

PCP9135-10 (Ivory)

PCP9135-02 (Anthracite grey)

PCP9135-12 (Steel)

*References to be requested from each manufacturer



Sound potentiometer

3 W, 27 Ω, mono

5TG4815-0WH


Packing 1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

Room thermostats


Room thermostat

Monitoring and control of temperatures in enclosed rooms
 Sensor type: Bi-metal, Voltage: Vac; 24 Vac 50 Hz
 Maximum Load: 230Vac 10 A; 24Vac 1 A
 Operating temperature; 5 to 30°C (Numeral scale in steps of 6°C)

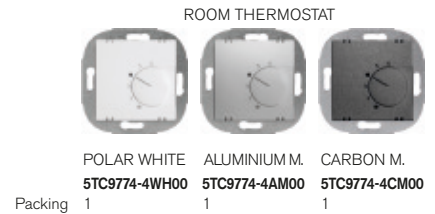

Heated floor, electronic thermostat

Electronic temperature control for heating systems, for example: electric heated floor systems, bathrooms, ceilings, marbles and heated walls.
 Voltage: 230 V ~, 50 Hz
 Sensor: external or internal & external (monitor).
 Floor sensor included in the package. Cutting capacity: 16(2) A
 Range: 10 to 50 °C (scale of 1 to 5)
 Indications (LEDs): heating up (Network), and eco mode activated (green).
 Extension of the sensor: up to 50 m only with 0.5 mm² cable, double insulated.
 Note: Ensure that the sensor cabling is contained in protective insulation. It is not possible to wire the sensor in parallel with AC power lines.

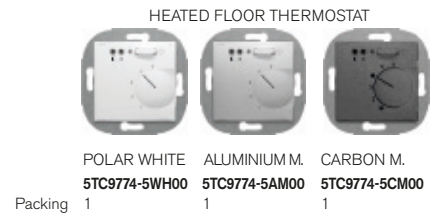

Heated floor Chronothermostat

Flush-mounted temperature and programmable time controller for electrical or hot water heating systems in rooms or heated floor (where actuators are normally closed). The device can be used as a room chronothermostat, as a room chronothermostat with floor temperature monitoring (using optional remote sensor), or as a floor chronothermostat (Remote sensor not included). This device has an adjustable weekly base timer switch with customisable programmes (the factory setting is for "normal" daily routines). Current: 230 V~, 50 Hz switching capacity: 10(2) / 230 V~ Sensor: NTC-internal (NTC can be connected as optional remote sensor) Ranges: - 5 to 30°C for ambient thermostat. -10 to 42°C for room thermostat. Battery life of 5 days without external power supply.



Motion detector



Spherical motion detector 3-wire mechanism **18555-3**

Contact rating (3-wire, relay output):
 Resistive load 2,300 W, 10 A max., cos φ = 1
 Inductive load 1,500 W, 5 A max., cos φ = 0.6
 Halogen with 1000 V transformer
 Electronic ballasts e.g. 2 x 36 W (20 max.)
 Compatible with LED loads

Packing 1



Buzzers and indicator lights



Buzzer module

- Polar white
- Aluminium metallic
- Carbon metallic

230V

Packing 1

5TG9875-8WH
5TG9875-8AM
5TG9875-8CM



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG2008-0WH	5TG2094	5TG2096	5TG2008-0SW	5TG2008-0SB
Packing	1	1	1	1	1



LED indicator light

90...240 V AC, 50/60 Hz
1 W, vertical or horizontal position

- White
- Blue
- Red
- Green


Packing 1

5TG9880-3
5TG9880-4
5TG9880-5
5TG9880-6



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG2010-0WH	5TG2095	5TG2097	5TG2010-0SW	5TG2010-0SB
Packing	1	1	1	1	1

Other inserts



Push-button, normally-open contact


5TD2120

Packing 1

ROCKER FOR CORD OPERATED SWITCH



Packing 1 **POLAR WHITE**
5TG6217-0WH



Push-button, changeover contact

5TD2123

Common to the entire DELTA-series


Packing 1

Blank cover



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG2558-0WH	5TG1250	5TG1220	5TG2558-0SW	5TG2558-0SB
Equivalent ref.	59033-WH	59033-AM	59033-CM	59033-SW	59033-SB
Packing	10	1	1	1	1

Cable output



	POLAR WHITE	ALUMINIUM M.	CARBON M.	MATT WHITE	MATT BLACK
	5TG2566-0WH	5TG1251	5TG1221	5TG2566-0SW	5TG2566-0SB
Equivalent ref.	59734-WH	59734-AM	59734-CM	59734-SW	59734-SB
Packing	10	1	1	1	1

Intermediate frame for 51x51mm inserts



	POLAR WHITE	ALUMINIUM M.	CARBON M.
	5TG2557-0WH	5TG1160	5TG1150
Packing	1	1	1

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).

Flush-mounting boxes



Flush-mounting box 2373-I
Thermoplastic material
Dimensions: 71x71x43 mm
Packing 640



Protective cover 2374-I
Allows you to locate the box
after plastering
Packing 1000



Claws for metal frames 16-GAR
Bag with 50 claws and 50
screws
To mount 25 frames



Flush-mounting box 2341
**1 element for
plasterboard wall**
Packing 120



Flush-mounting box 2342
**2 elements for
plasterboard wall**
Packing 60



Flush-mounting box 2343
**3 elements for
plasterboard wall**
Packing 35



Flush-mounting box 2344
**4 elements for
plasterboard wall**
Packing 30



Flush-mounting box 2345
**5 elements for
plasterboard wall**
Packing 21



Hole saw hardened teeth shank for plasterboard wall 2158000
diam. 68mm
depth 40mm
Packing 1





Deburrer for Plasterboard 5892000 **NEW**
Ø 68 mm
Tool for flush installation
of hollow wall boxes
Packing 1








Replacement blades 5893000 **NEW**
for ref. 5892000
Packing 1

To achieve the designed installation results, the use of these boxes and the hole saw hardened teeth shank is recommended.






Miro thermoplastic frames



	POLAR WHITE	Packing	ALUMINIUM METALLIC	Packing	CARBON METALLIC	Packing	MATT WHITE	Packing	MATT BLACK	Packing
	5TG1111-0WH 59001-WH	10	5TG1111-1 59001-AM	1	5TG1111-2 59001-CM	1	5TG1111-0SW 59001-SW	1	5TG1111-0SB 59001-SB	1
	5TG1112-0WH 59002-WH	10	5TG1112-1 59002-AM	1	5TG1112-2 59002-CM	1	5TG1112-0SW 59002-SW	1	5TG1112-0SB 59002-SB	1
	5TG1113-0WH 59003-WH	10	5TG1113-1 59003-AM	1	5TG1113-2 59003-CM	1	5TG1113-0SW 59003-SW	1	5TG1113-0SB 59003-SB	1
	5TG1114-0WH 59004-WH	10	5TG1114-1 59004-AM	1	5TG1114-2 59004-CM	1	5TG1114-0SW 59004-SW	1	5TG1114-0SB 59004-SB	1
	5TG1115-0WH 59005-WH	1	5TG1115-1 59005-AM	1	5TG1115-2 59005-CM	1	5TG1115-0SW 59005-SW	1	5TG1115-0SB 59005-SB	1

Miro glass frames









	CRYSTAL GREEN	Packing	WHITE	Packing	BLACK	Packing	SAND	Packing	ORIENT RED	Packing
	5TG1201 59001-VG	1	5TG1201-1 59001-CB	1	5TG1201-2 59001-NE	1	5TG1201-4 59001-AE	1	5TG1201-3 59001-RO	1
	5TG1202 59002-VG	1	5TG1202-1 59002-CB	1	5TG1202-2 59002-NE	1	5TG1202-4 59002-AE	1	5TG1202-3 59002-RO	1
	5TG1203 59003-VG	1	5TG1203-1 59003-CB	1	5TG1203-2 59003-NE	1	5TG1203-4 59003-AE	1	5TG1203-3 59003-RO	1
	5TG1204 59004-VG	1	5TG1204-1 59004-CB	1	5TG1204-2 59004-NE	1	5TG1204-4 59004-AE	1	5TG1204-3 59004-RO	1
	5TG1205 59005-VG	1	5TG1205-1 59005-CB	1	5TG1205-2 59005-NE	1	5TG1205-4 59005-AE	1	5TG1205-3 59005-RO	1

For correct installation of Miro frames in cavity walls, it is necessary to use the 2158000 or 5892000 hole saw (or equivalent) to make the recessing box flush with the wall.





Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling).





Miro pure aluminium frames







	ALUMINIUM	Packing	YELLOW OXID	Packing
	5TG1121-0 59001-AL	1	5TG1121-3 59001-AO	1
	5TG1122-0 59002-AL	1	5TG1122-3 59002-AO	1
	5TG1123-0 59003-AL	1	5TG1123-3 59003-AO	1
	5TG1124-0 59004-AL	1	5TG1124-3 59004-AO	1
	5TG1125-0 59005-AL	1	5TG1125-3 59005-AO	1

Miro solid wood frames



	MAPLE RED	Packing	MAPLE	Packing	CHERRY (TREATED COLOUR)	Packing	WENGE (TREATED COLOUR)	Packing	BEECH (TREATED COLOUR)	Packing
	5TG1101-2 59001-AJ	1	5TG1101-3 59001-AR	1	5TG1101-1 59001-CE	1	5TG1101-0 59001-WE	1	5TG1101-4 59001-HA	1
	5TG1102-2 59002-AJ	1	5TG1102-3 59002-AR	1	5TG1102-1 59002-CE	1	5TG1102-0 59002-WE	1	5TG1102-4 59002-HA	1
	5TG1103-2 59003-AJ	1	5TG1103-3 59003-AR	1	5TG1103-1 59003-CE	1	5TG1103-0 59003-WE	1	5TG1103-4 59003-HA	1
	5TG1104-2 59004-AJ	1	5TG1104-3 59004-AR	1	5TG1104-1 59004-CE	1	5TG1104-0 59004-WE	1	5TG1104-4 59004-HA	1

MEASUREMENTS

	90 x 90 mm
	90 x 161 mm
	90 x 232 mm
	90 x 303 mm

For correct installation of Miro frames in cavity walls, it is necessary to use the 2158000 or 5892000 hole saw (or equivalent) to make the recessing box flush with the wall.

Note: Equivalent ref. is a valid reference for order entering (also available on the product package labelling)